


Hanergy
Thin Film Power



www.otmenergi.se

HanTile

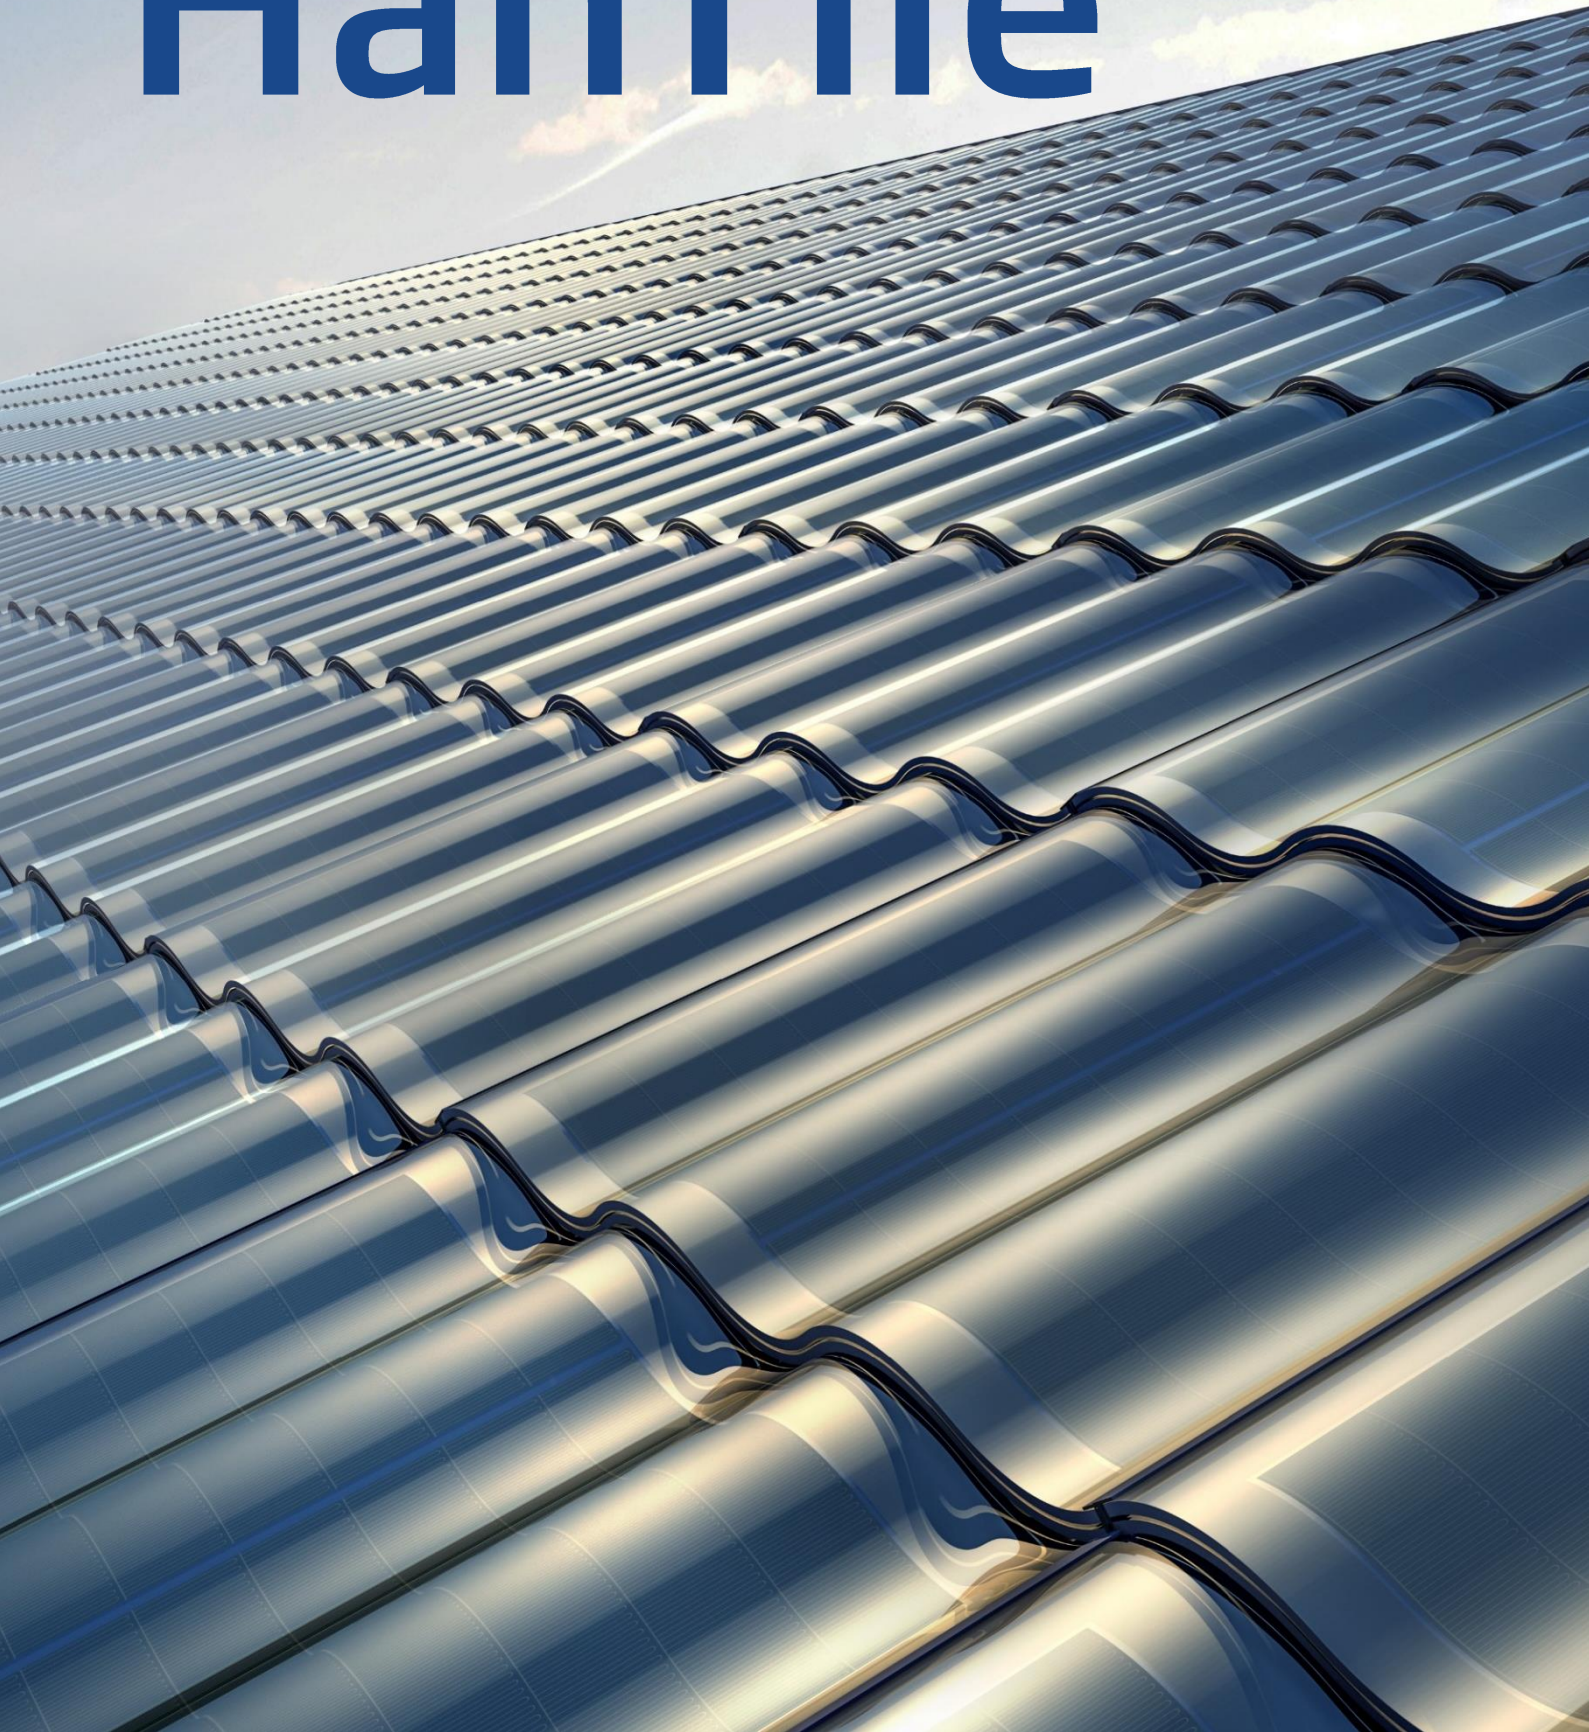

HanTile



Pallet Information

Pallet size (cm)	Net weight (kg)	Gross weight (kg)	HanTiles
115*115*68	500	525	52

Container	Pallets/Container	HanTiles / Container
20ft	21	1092
40ft	45	2340

Side Tiles

Pallet size (cm)	Amount
115*115*68	180-200 pieces

Hanergy
Thin Film Power

Hanergy Thin Film Power EME B.V.
WTC-Tower H
Zuidplein 138
1077 XV Amsterdam

+31(0)20 675 35 88
www.hanergy.eu
info@hanergy.eu

Characteristics

Product model	HW-MQSB-V1
Length	721 (± 2) mm
Width	500 (± 1) mm
Height	41 (± 1.5) mm
Weight	10 (± 0.5) kg
Color	Black, Grey
Junctionbox	39*46*16.6 mm IP67
Cable connector	MC4
Cable	2.5 mm solar cable 450 (± 10) mm
Apparent size	703 * 415 mm
Area panel/m ²	3.43
Wp/m ²	103

Electrical Characteristics

Cell type	IGS
Nominal power	30W
Short circuit current	4A
Open circuit voltage	10.6V
Current at MPP	3.5A
Voltage at MPP	8.6V
Max. series fuse rating	7A
Max. system voltage	1000V(IEC) / 600V(UL)

Performance

Max. snowload	5400 Pa
Max. windload	2400 Pa
Protection class	IP67
Anti-hail class	4 (ANSIFM 4473)
Fire-resistance rating	A (UL790)
Operating temperature	-40°C to +85°C
Operating humidity	0-80%

Certificate

TÜV IEC 61646/IEC 61730/ISO9001/CE